

18.40 RXJ



www.ommelift.dk

CRAWLER MOUNTED BOOM PLATFORM

OMME LIFT A/S – Lægårdsvej 4 – DK 7260 Sdr. Omme
Phone: + 45 753 413 00 – Fax: + 45 753 415 92
E-mail: omme@ommelift.dk – Web: www.ommelift.dk


OMMELIFT



Quality since 1906

18.40 RXJ

Crawler mounted

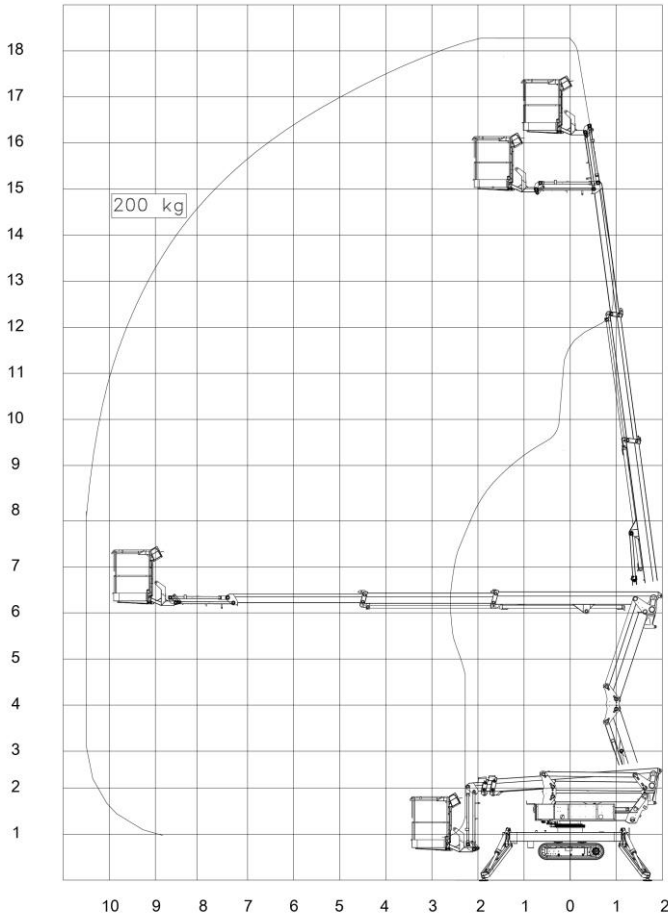

Technical Data:	18.40 RXBJ Battery-power	18.40 RXBPJ Engine & battery	18.40 RXBDJ Hybrid-power
Max. working height	18.25 m		
Max. outreach	10.50 m		
Max. basket load	200 kg		
Basket size	1.4 x 0.7 x 1.1 m		
Turret rotation	± 355°		
Basket rotation	± 41°		
Battery	24V/400Ah/5h	24V/200Ah/5h	24V/200Ah/5h
Charger	24 V/30 A	24 V/30 A	24 V/30 A
Petrol engine		8.7kW/11.7hp	
Diesel engine			9.9kW/13.3hp
Generator			24 V/20 A
Total weight	2980 kg	2860 kg	2900 kg
Travelling length	5.55 m / 4.85 m		
Travelling height	1.99 m		
Travelling width	0.79 / 1.18 m		
Operational width	3.25 m		
Up and down slope up to	30% (17°)		
Stabilization up to	21% (12.0°)		
Proportional controls	Standard		
230 V outlet in basket	Standard		
Double charger system	Standard	Option	Option
Wireless remote control	Option		
Automatic levelling	Option		
Non-marking tracks	Option		

MORE OUTREACH



Up and over



Narrow



Flush basket mount



Intuitive controls

18.40 RXJ has an articulating riser system working in a straight vertical line, providing maximum up and over outreach. The compact dimensions give exceptional maneuverability in confined spaces. Simple and intuitive controls make operator instruction easy and work quicker. The standard version includes petrol engine and battery power. Continuous re-charge without interruptions is possible with an on-board charger during lift operation.

True hybrid Diesel engine and battery power with automatic re-charge of the battery pack when the engine is on. As on the standard version, continuous re-charge is also possible with the on-board charger during lift operation. Battery power means no direct mains power annoyance with trailing power cables and voltage drop.

Battery only version No fume operation with an extra, large battery capacity. In order to accommodate extreme and long term usage a double charger pack for direct mains connection is included.

Optional.

Non-marking tracks inclusive of non-marking stabilizer plates (for indoor use only)
Wireless drive and set-up from ground or basket
(Operation from hotspot).

- **Unrestricted outreach**
- **Detachable basket**
- **No computerisation**
- **Rental ready**